


BiTLAN[®] U/FTP cat.6A 500 MHz



Data transmission cable, screened

BITNER BiTLAN U/FTP 4P cat. 6A 500MHz

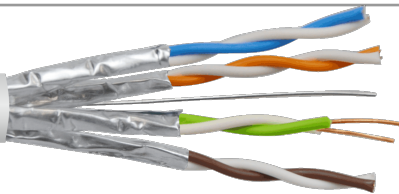

LAN cables



Technical data:

Thermal parameters:

Temperature range:

operating temperature: -30 °C to 70 °C
min. installation temp: -10 °C

Electrical parameters:

Conductor diameter: 0,57 ± 0,015 mm

Insulated core diameter: 1,27 ± 0,03 mm

DC loop resistance at 20 °C (max):

145 Ω/km

Insulation resistance (min): 5 GΩ x km

Resistance unbalance within a pair: ≤ 2 %

Mutual capacitance at 1 kHz: 45 ± 5 nF/km

Capacitance unbalance pair to ground at 1 kHz (max): 1600 pF/km

Nominal voltage: 150 V

Test voltage at 1 min.:

AC 50 Hz: 700 V

DC: 1000 V

Characteristic impedance at 100 MHz:

100 ± 5 Ω

NVP value: 74 %

Return loss dB (min):

f = 4 + 10 MHz: 20 + 5 x log₁₀(f)

f = 10 + 20 MHz: 25

f = 20 + 250 MHz: 25 - 7 x log₁₀(f/20)

f = 250 + 500 MHz: 17,3

Coupling attenuation within the range of 30 + 100 MHz (min.): 70 dB

Transfer impedance at 10 MHz (max):


100 mΩ/m

Mechanical parameters:

Bending radius:

during operation: ≥ 6 x Ø

during installation: ≥ 8 x Ø

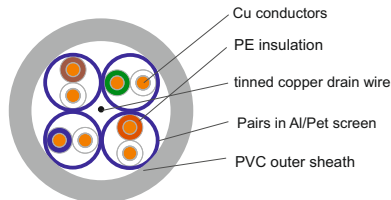

Design:

Conductors:

solid round copper conductors

Insulation:

special polyolefin compound

Core identification:

wh/bu, wh/or, wh/gn, wh/bn

Core arrangement:

cores twisted in pairs, screened pairs twisted together with tinned copper drain wire
pairs individually screened with aluminium backed polyester tape

Screen:

PVC compound

Outer sheath:

grey RAL 7035, other colours available on customer's request

Outer sheath colour:

grey RAL 7035, other colours available on customer's request

Marking: BITNER BiTLAN U/FTP 4P cat.6A 500MHz EN 50173-1 ISO/IEC 11801 ANSI/TIA 568-C.2 ID no. CE RoHS www.bitner.com.pl meters

Application:

BiTLAN U/FTP cat.6A 500 MHz cables are applicable to computer networks with operating frequency band up to 500MHz. Suitable for transmission of data, audio and video signals, with bitrate up to 10Gb/s. Additional individual Al/Pet screen with tinned copper drain wire acts as a protection against external electromagnetic interferences. Dedicated for fixed installations within indoor structured cabling systems as per EN 50173-1, ISO/IEC 11801, ANSI/TIA 568-C.2 standards, as well as within industrial networks exposed to external electromagnetic interferences. Cables classified according to **EN 50575 (CPR)**.

Packaging:



plywood reel
500m



plywood reel/
drum
1000m

Cat. no.	Construction	Cu wire	Outer diameter* [mm]	CPR classification EN 50575	Cable weight [kg]	Bandwidth [MHz]
T10074	U/FTP cat.6A	23AWG	7,5	Eca	54	500

*Outer diameter tolerance: +/-5%

Cable Factory BITNER reserves the right to modify the specifications without prior notice

BiTLAN[®] U/FTP cat.6A 500 MHz

Data transmission cable, screened

Requirements of teletransmission data:

Frequency MHz	1	4	10	16	20	31,25	62,5	100	125	155	175	200	250	300	500
Attenuation \leq dB/100m	2,1	3,8	5,9	7,5	8,4	10,5	15,0	19,1	21,5	24,1	25,7	27,6	31,1	34,3	45,3
NEXT \geq dB	75,3	66,3	60,3	57,2	55,8	52,9	48,4	45,3	43,8	42,4	41,7	40,8	39,3	38,1	34,8
PS NEXT \geq dB	72,3	63,3	57,3	54,2	52,8	49,9	45,4	42,3	40,8	39,4	38,7	37,8	36,3	35,1	31,8
ELFEXT \geq dB/100m	68,0	56,0	48,0	43,9	42,0	38,1	32,1	28,0	26,1	24,2	23,1	22,0	20,0	18,5	14,0
PS ELFEXT \geq dB/100m	65,0	53,0	45,0	41,9	39,0	35,1	29,1	25,0	23,1	21,2	20,1	19,0	17,0	15,5	11,0
RL \geq dB	20,0	23,0	25,0	25,0	25,0	23,6	21,5	20,1	19,4	18,8	18,4	18,0	17,3	17,3	17,3

Transmission parameters graphs - examples of measurement results

