

BiTLAN[®] S/FTP cat.7 1000 MHz

RoHS 2015/863/EU



LVD 2014/35/EU


CPR

CPR 305/2011

24 months warranty

LSOH Halogen-free, data transmission cable, screened

BITNER BiTLAN S/FTP 4P cat. 7 1000MHz LSOH

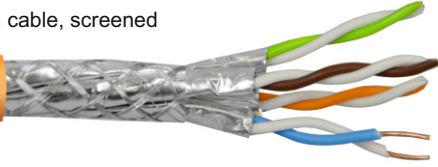

internal application



EN 60332-1-2

halogen-free
EN 60754low smoke emission
EN 61034

data transmission

Technical data:

Thermal parameters:

Temperature range:

operating temperature: -30 °C to 70 °C
min. installation temp: -10 °C

Electrical parameters:

Conductor diameter: 0,57 ± 0,015 mm

Insulated core diameter: 1,35 ± 0,03 mm

DC loop resistance at 20 °C (max):
145 Ω/km

Insulation resistance (min): 2 GΩ x km

Resistance unbalance within a pair: ≤ 2 %

Mutual capacitance at 1 kHz: 45 ± 5 nF/km

Capacitance unbalance pair to ground at 1 kHz (max): 1600 pF/km

Nominal voltage: 150 V

Test voltage at 1 min.:

AC 50 Hz: 700 V

DC: 1000 V

Characteristic impedance at 100 MHz:

100 ± 5 Ω

NVP value: 77 %

Return loss dB (min):

f = 4 + 10 MHz: 20 + 5 x log₁₀(f)

f = 10 + 20 MHz: 25

f = 20 + 250 MHz: 25 - 7 x log₁₀(f/20)

f = 250 + 600 MHz: 17,3

Coupling attenuation within the range of 30 + 100 MHz (min.): 80 dB

Transfer impedance at 10 MHz (max):


10 mΩ/m.

Mechanical parameters:

Bending radius:

during operation: ≥ 6 x Ø

during installation: ≥ 8 x Ø

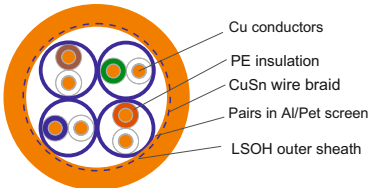

Design:

Conductors:

solid round copper conductors

Insulation:

special polyolefin compound

Core identification:

wh/bu, wh/or, wh/gn, wh/bn

Core arrangement:

cores twisted in pairs, screened pairs twisted together with tinned copper drain wire

Screen 1:

aluminium backed polyester tape on every pair

Screen 2:

tinned copper wire braid

Outer sheath:

special LSOH compound

Outer sheath colour:

orange RAL 2003, other colours available on customer's request

Marking: BITNER BiTLAN S/FTP 4P cat.7 1000MHz LSOH EN 50173-1

ISO/IEC 11801 IEC 61156-5 ID no. CE RoHS www.bitner.com.pl meters

Application:

BiTLAN S/FTP cat.7 1000MHz LSOH cables are applicable to computer networks with operating frequency band up to 1000MHz. Suitable for transmission of data, audio and video signals, with bitrate up to 10Gb/s. Cables meet the requirements of category 7 in 1+600 MHz range for fixed installations within indoor structured cabling systems as per EN 50173-1, ISO/IEC 11801, IEC 61156-5 standards and are tested up to 1000 MHz range for information purposes. Common and individual shielding additionally improves the teletransmission parameters against external electromagnetic interferences and crosstalks between the pairs, therefore they can be used in industrial networks exposed. Cables have a halogen-free outer sheath ensuring low smoke emission acc. to EN 50268, IEC 61034-1(2) and limited emission of corrosive gases acc. to EN 50267, IEC 60754-2 should be installed in places with increased fire safety requirements. Cables classified according to **EN 50575 (CPR)**.

Packaging:

plywood reel
500mplywood reel/
drum
1000m

Cat. no.	Construction	Cu wire	Outer diameter* [mm]	CPR classification EN 50575	Cable weight [kg]	Bandwidth [MHz]
TI0086	S/FTP cat.7 LSOH	23AWG	7,8	Dca	66	1000

*Outer diameter tolerance: +/-5%

Cable Factory BITNER reserves the right to modify the specifications without prior notice

BiTLAN[®] S/FTP cat.7 1000 MHz

LSOH Halogen-free, data transmission cable, screened

Requirements of teletransmission data:

Frequency MHz	1	4	10	16	20	31,25	62,5	100	155	200	300	600	750	900	1000
Attenuation ≤ dB/100m	2,0	3,6	5,7	7,2	8,1	10,1	14,5	18,5	23,4	26,8	33,3	48,9	55,4	61,5	67,6
NEXT ≥ dB	80,0	80,0	80,0	80,0	80,0	80,0	75,5	72,4	69,6	67,9	65,3	60,8	59,3	58,1	56,9
PS NEXT ≥ dB	77,0	77,0	70,0	77,0	77,0	77,0	72,5	69,4	66,6	64,9	62,3	57,8	56,3	55,1	53,9
ELFEXT ≥ dB/100m	80,0	80,0	74,0	69,9	68,0	64,1	58,1	54,0	50,2	48,0	44,5	38,4	36,5	34,9	33,3
PS ELFEXT ≥ dB/100m	77,0	77,0	71,0	66,9	65,0	61,1	55,1	51,0	47,2	45,0	41,5	35,4	33,5	31,9	30,3
RL ≥ dB	20,0	23,1	25,0	25,0	25,0	23,7	21,6	20,1	18,8	18,0	17,3	17,3	17,3	17,3	17,3

Values above the 600 MHz frequencies are for information purpose

Transmission parameters graphs - examples of measurement results

