

BiTLAN[®] U/UTP cat.5e 200 MHz

LSOH Data transmission cable, halogen-free



BITNER BiTLAN U/UTP 4x2x24AWG(0,5) cat. 5e 200MHz LSOH



internal application



data transmission



EN 60332-1-2



halogen-free
EN 60754



low smoke emission
EN 61034

Technical data:

Thermal parameters:

Temperature range:

operating temperature: -30 °C to 70 °C
min. installation temp: -10 °C


Electrical parameters:

Conductor diameter: 0,5 ± 0,015 mm
Insulated core diameter: 0,86 ± 0,03 mm
DC loop resistance at 20 °C (max): 190 Ω/km
Insulation resistance (min): 5 GΩ x km
Resistance unbalance within a pair: ≤ 2 %
Mutual capacitance at 1 kHz: 50 ± 5 nF/km
Capacitance unbalance pair to ground at 1 kHz (max): 1600 pF/km
Nominal voltage: 150 V
Test voltage at 1 min:
AC 50 Hz: 700 V
DC: 1000 V
Characteristic impedance at 100 MHz:
100 ± 5 Ω
NVP value: 69 %
Return loss dB (min):
f = 4 + 10 MHz: 20 + 5 x log₁₀(f)
f = 10 + 20 MHz: 25
f = 20 + 200 MHz: 25 - 7 x log₁₀(f/20)

Mechanical parameters:

Bending radius:

during operation: ≥ 6 x Ø
during installation: ≥ 8 x Ø

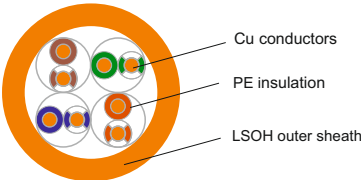

Design:

Conductors:

solid round copper conductors

Insulation:

special polyolefin compound

Core identification:

wh/bu-bu, wh/or-or, wh/gn-gn, wh/bn-bn

Core arrangement:

cores twisted in pairs, pairs twisted together

Outer sheath:

special LSOH compound

Outer sheath colour:

orange RAL 2003, other colours available on customer's request

Marking: BITNER BiTLAN U/UTP 4x2x24AWG(0,5) cat.5e 200MHz LSOH
EN 50173-1 ISO/IEC 11801 ANSI/TIA 568-C.2 ID no. CE RoHS
www.bitner.com.pl/meters

Application:

BiTLAN U/UTP cat.5e 200MHz LSOH cables are applicable to computer networks with operating frequency band up to 200MHz. Suitable for transmission of data, audio and video signals with bitrate up to 1Gb/s. Dedicated for fixed installations within indoor structured cabling systems as per EN 50173-1, ISO/IEC 11801, ANSI/TIA 568-C.2 standards, as well as within industrial networks not exposed to external electromagnetic interferences. Cables with flame retardant LSOH outer sheath ensuring low smoke emission acc. to EN 50268, IEC 61034-1(2) and limited emission of corrosive gases acc. to EN 50267, IEC 60754-2, should be installed in places with increased fire safety requirements. Cables classified according to **EN 50575 (CPR)**.

Packaging:



box
(305m)



pallet 10 980m
(36x305m)



plywood reel
500m



plywood reel/
drum
1000m

Cat. no.	Construction	Cu wire	Outer diameter* [mm]	CPR classification EN 50575	Cable weight [kg]	Bandwidth [MHz]
TI0008	U/UTP cat.5e LSOH	24AWG(0,5)	4,8	Dca	28	200

*Outer diameter tolerance: +/-5%

Cable Factory BITNER reserves the right to modify the specifications without prior notice

BiTLAN[®] U/UTP cat.5e 200 MHz

LSOH Data transmission cable, halogen-free

Requirements of teletransmission data:

Frequency MHz	1	4	10	16	20	30	45	60	80	100	120	130	155	175	200
Attenuation ≤ dB/100m	2,1	4,0	6,3	8,0	9,0	11,2	13,9	16,2	18,9	21,3	23,6	24,7	27,2	29,2	31,5
NEXT ≥ dB	65,3	56,3	50,3	47,2	45,8	43,1	40,5	38,6	36,7	35,3	34,1	33,6	32,4	31,6	30,8
PS NEXT ≥ dB	62,3	53,3	47,3	44,2	42,8	40,1	37,5	35,6	33,8	32,3	31,1	30,6	29,5	28,6	27,8
ELFEXT ≥ dB/100m	63,8	51,8	43,8	39,7	37,8	34,3	30,7	28,2	25,7	23,8	22,2	21,5	20,0	19,0	17,8
PS ELFEXT ≥ dB/100m	60,8	48,8	40,8	36,7	34,8	31,3	27,7	25,2	22,7	20,8	19,2	18,5	17,0	16,0	14,8
RL ≥ dB	20,0	23,0	25,0	25,0	25,0	23,8	22,5	21,7	20,8	20,1	19,5	19,3	18,8	18,4	18,0

Transmission parameters graphs - examples of measurement results

